


GGD AC Low Voltage Distribution Switchgear

Introduction

GGDI AC low voltage distribution switchgear (hereinafter referred to as distribution switchgear) is used in power plant, electric power substation and industrial and mining enterprises, for purposes of electric energy conversion, distribution and control in the power distribution system of 50Hz AC, 380V rated operational voltage and rated operational current up to 5000A, used as power, lightning and switching equipment.

Model and Meaning

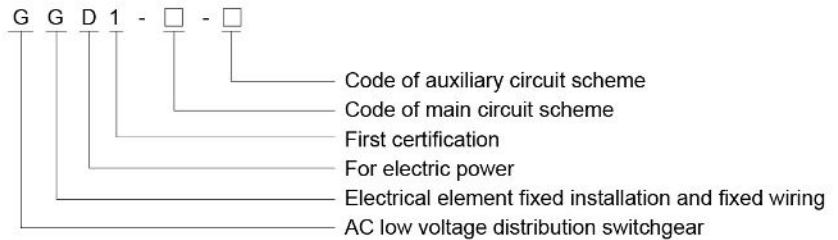

Structure

Switchgear body is in the form of general cabinet. The frame work employs 8MF cold-formed steel and partial welded. In order to meet the dimension accuracy and quality, the frame work fittings and special fittings are supplied by indicated manufactory. General cabinet fittings are designed by modular method. There are 20 modular mounting holes. It has a high universal coefficient. Therefore, it enables factories to realize preproduction, shorten the production and increase the work efficiency.

The heat-dissipation issue is taken into consideration during designation. There are numbers of heat-dissipation holes on the upper and lower plates. When the electric components heat, causing temperature to rise. The hot air goes out through upper holes, while cold air comes from lower holes. The formation of circulation system can dissipate heat.

In terms of modern industrial product design standard, the switchgear dimension and other parts are designed in golden ratio. Therefore, the switchgear with elegant appearance may offer you a kind of refreshing feeling.

Connected with the frame work with rotating shaft type movable hinge, the switchgear door is easy to install and unload. The edge fold areas of the door are all embedded with rubber and plastic strips in the shape of Chinese character "山". There is a certain compression stroke between the door and insertion strip of the frame work when closing the door. It prevents the door and cabinet from knock-on collision.

The instrument gate with electric elements is connected with the frame work by multiple annealed copper wires. Thus the entire switchgear forms a complete earthing protection circuit.

Switchgear coat is polyester orange shape baking finish which has perfect adhesion and favorable tactile sensation. Color of the cabinet is matt. Therefore, it avoids the glare effect and creates a comfortable visual for operators.

For convenient in-site assembling and adjusting of main busbar, the top plate of switchgear can be removed when needed. Lifting lugs on the four corners for lifting and transportation.

Switchgear has a protection level of IP30. Users can choose from IP20 to IP40 according to actual requirements of the environmental conditions.

Technical parameters

Mode	Rated voltage (V)	Rated current (A)	Rated short-time withstand current (kA)	Rated peak value withstand current (kA)
GGD1	380	630,800,1000,1600	50,65,80	105,140,176

Primary circuit scheme

Distribution switchgear primary circuit scheme and inside main electric components refer to Table 2. For main schemes, technical statements are shown as below,

Primary components selection

Distribution switchgear has a wide range of application. Based on the principle of security, economical efficiency, reasonableness and reliability, old style and poor performance components are not permitted. Products produced by our company with excellent technical performance are used in recent years. Meanwhile several kinds of classic products are kept in the switchgear. Since switchgear structure has excellent flexibility of installation, even if some products are to be eliminated as required by relevant competent department or some users make any specific requirements, it will not be difficult to replace or update the componets inside the distribution switchgear.

Type of incoming line

In order to satisfy different incoming line ways of different engineering designs, incoming line modes of the distribution cabinet include the common modes of incoming line from the upside and the underside, from left side, middle part and right side of the cabinet top and rear end of the cabinet.

Derating

Distribution switchgear is equipped with a good natural air circulation system for solving the problems of temperature rising and derating when components are installed inside the sealed cabinet. Experienced with much verification, we confirmed of the success of air circulation system design. Therefore, when selecting distribution switchgear, similar components can be installed in open-type cabinet, as well as the derating coefficient can be referred to the common design.

Reactive power automatic compensation cabinet

For the purpose to match the switchgear when customer chooses this series of switchgear, there is another product in this series called reactive power compensation switchgear (refer to as GGJ). Dimension of the GGJ is the same as GGD1. See its primary circuit scheme in Table 2.

Outline dimension and mounting dimension

Outline dimension of GGD1 AC low voltage distribution switchgear is shown in Figure 1, mounting dimension in Figure 2.

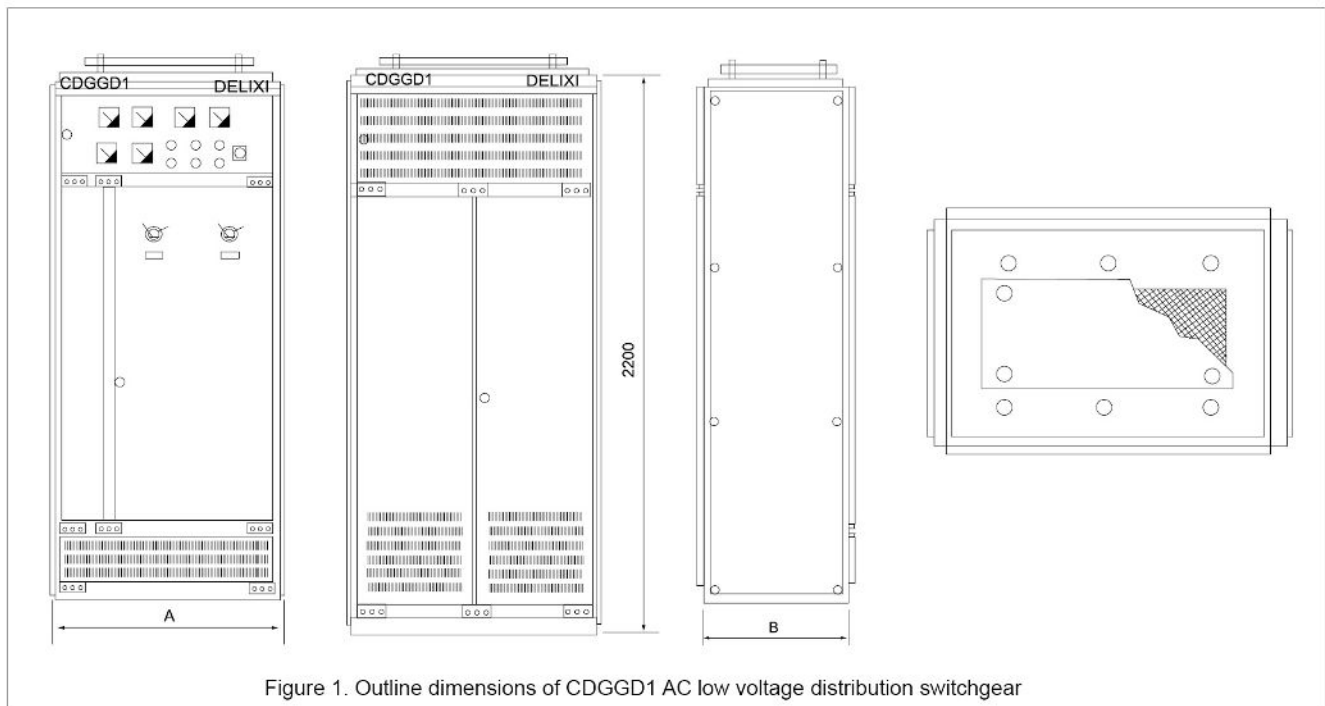


Figure 1. Outline dimensions of CDGGD1 AC low voltage distribution switchgear

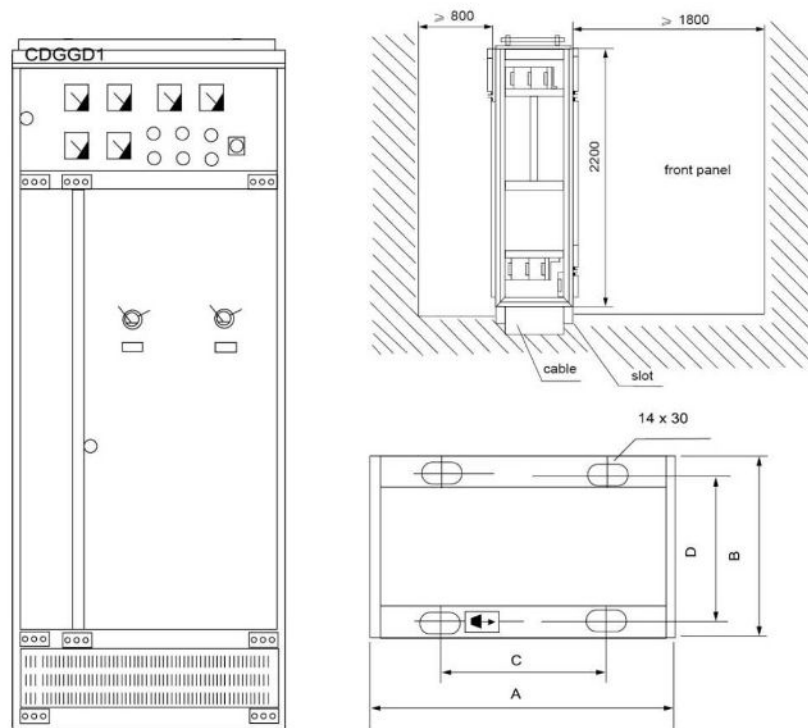


Figure 2. Mounting dimensions of CDGGD1 AC low voltage distribution switchgear

A	B	C	D
600	600	450	556
600	800	450	756
800	600	650	556
800	800	650	756
1000	600	850	556
1000	800	850	756
1200	800	1050	756

Working environment

- 1 Sea level elevation of mounting and working place shall not exceed 2000m;
- 2 Ambient temperature shall be below +40 °C and no less than -5 °C . Average temperature during 24 hours shall not be higher than +35 °C ;
- 3 Indoor relative humidity shall not be higher than 90% (when the temperature is 25 °C) ;
- 4 A place without conductive dust and gas that may corrode the metal and destroy the insulating performance;
- 5 A place without the dangers of fire hazard or explosion;
- 6 A place without severe vibration or jounce; Vertical inclination degree of such place shall be no more than 5°;
- 7 For any specific using requirements, please notify the factory in advance when you order it.

Ordering information

When ordering, please provide following material and data:

- 1 Complete model number of product (including code of main circuit scheme and code of auxiliary circuit scheme)
- 2 Main circuit system sequential combination diagram
- 3 Electric schematic diagram of auxiliary circuit
- 4 List of components in the switchgear
- 5 For any specific product requirement, please notify us in advance.

Special declaration

The product of our company has passed the National Quality CCC Certification. Short-time withstand currents are 50kA, 65kA and 80kA.

Main circuit scheme

GGD1 includes 49 schemes and 123 specifications (see Table 2)

Serial number of primary circuit scheme	01			02			03			04			05			06		
Primary circuit schematic diagram																		
Quantity	Electricity incoming			Electricity incoming			Electricity incoming			Electricity incoming			Electricity incoming			Electricity incoming Feeding		
Usage																		
Code of scheme																		
Model and Name	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C
HD13BX-150/30 knife switch				1			1			1			1					
HD13BX-1000/31 knife switch					1			1			1			1				
HD13BX-600/31 knife switch																	1	
DW15-1600/3 circuit breaker												1						
DW15-1000/3 circuit breaker													1					
DW15-630/3 circuit breaker														1				
LMZ1-0.66 □ /5 current transformer										1	1		3	3	3			
Width of switchgear(mm)	600	600	600	600	1000	1000		1000	1000		800	800		800				
Width of switchgear(mm)	600	600	600	600	600	600		600	600		600	600		600				
Note	DW15 1600 and 1000/3 low voltage circuit breakers are equipped with motor-operating mechanism and DW15 630, 400 and 200/3 low voltage circuit breakers are equipped with electromagnetic operating mechanism. Similarly hereinafter.																	

Serial number of primary circuit scheme	07			08			09			10			11			12		
Primary circuit schematic diagram																		
Quantity	Electricity incoming connecting			Electricity incoming connecting			Electricity incoming connecting			Electricity incoming connecting			Electricity incoming			Electricity incoming connecting		
Usage																		
Code of scheme																		
Model and Name	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C
HD13BX-150/30 knife switch	1			1			1			1			2			2		
HD13BX-1000/31 knife switch		1			1			1			1			2			2	
DW15-1600/3 circuit breaker				1			1			1						1		
DW15-1000/3 circuit breaker					1			1			1						1	
LMZ1-0.66 □ /5 current transformer				3(4)	3(4)		3(4)	3(4)		3(4)	3(4)		3(4)	3(4)		3(4)	3(4)	
Width of switchgear(mm)	600	600		800	800		1000	1000		1000	1000		1000	1000		1000	1000	
Width of switchgear(mm)	600	600		600	600		600	600		600	600		600	600		600	600	
Note	The increase of a current transformer quantity in the bracket is for reactive power automatic compensation cabinet. When it is needed to set measuring instrument in distance range and install repay protection in the cabinet, current transformer shall be LMZ3D-0.66 model. Similarly hereinafter																	

Serial number of primary circuit scheme	13			14			15			16			17			18		
Primary circuit schematic diagram																		
Quantity	Electricity incoming connecting			Electricity incoming connecting			Electricity incoming connecting			Electricity incoming connecting			Electricity incoming			Electricity incoming connecting		
	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C
Model and Name	A			B			C			A			B			C		
HD13BX-150/30 knife switch	2															1		
HD13BX-1000/31 knife switch				2														
HS13BX-1000/31(41) knife switch							1			1			1					
DW15-1600/3 circuit breaker	1															1		
DW15-1000/3 circuit breaker				1			1			1			1					
LMZ1-0.66 □ /5 current transformer	3(4)			3(4)			3(4)			3(4)						3(4)		
Width of switchgear(mm)	1000			1000			1000			1000						1000		
Width of switchgear(mm)	600			600			600			600						600		
Note																		

Serial number of primary circuit scheme	19			20			21			22			23			24		
Primary circuit schematic diagram																		
Quantity							Contact			Contact Feeding			Contact			Feeding Standby		
	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C
Model and Name	A			B			C			A			B			C		
HD13BX-150/30 knife switch							2			2								
HD13BX-1000/31 knife switch							2			2								
HS13BX-1000/31(41) knife switch																1		
HS13BX-600/31(41) knife switch																1		
HS13BX-400/31(41) knife switch																1		
DW15-630/3 circuit breaker																1		
DW15-400/3 circuit breaker																1		
DW15-200/3 circuit breaker																1		
CDM7-400/3 □ circuit breaker										2								
CDM7-250/3 □ circuit breaker										2								
NT- □ fuse							3			3								
JDG-0.5 380/100V voltage transformer							2(3)			2(3)								
LMZ1-0.66 □ /5 current transformer										2						3		
LMZ3-0.66 □ /5 current transformer										2						3		
Width of switchgear(mm)							1000			1000			600			600		
Width of switchgear(mm)							600			600			600			600		
Note	Quantity of voltage transformer in the bracket is used for neutral-point earthing by high-resistance. Similarly hereinafter.																	

Serial number of primary circuit scheme	25			26			27			28			29			30		
Primary circuit schematic diagram																		
Quantity	Feeding Standby			Feeding Standby			Feeding Standby			Contacting Standby Feeding			Contacting Standby Feeding			Contacting Standby Feeding		
	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C
Model and Name																		
HD13BX-600/30 knife switch											1			1				
HS13BX-1000/31(41) knife switch	1			1			1			1			1					
HS13BX-600/31(41) knife switch		1			1			1										
HS13BX-400/31 knife switch			1			1			1									
CDM7-400/3 □ circuit breaker	2																	
CDM7-250/3 □ circuit breaker		2		4	2		4	2										
CDM7-125/3 □ circuit breaker			2		2	4		2	4		2			2				
LMZ1-0.66 □ /5 current transformer	2						3	3	3									
LMZ3-0.66 □ /5 current transformer		2	2	4	4	4	4	4	4		2			2				
Width of switchgear(mm)	600	600	600	800	800	800	800	800	800		800			800				
Width of switchgear(mm)	600	600	600	600	600	600	600	600	600		600			600				
Note																		

Serial number of primary circuit scheme	31			32			33			34			35			36		
Primary circuit schematic diagram																		
Quantity	Contact Standby Feeding			Contact Standby Feeding			Feeding			Feeding			Feeding			Feeding		
	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C
Model and Name																		
HD13BX-1500/30 knife switch							1											
HD13BX-1000/31 knife switch								1		1			1			1		
HD13BX-600/31 knife switch		1			1						1			1			1	
HD13BX-400/31 knife switch									1			1			1			
HS13BX-600/31(41) knife switch		1			1													
DW15-630/3 circuit breaker							2											
CDM7-400/3 □ circuit breaker								2										
CDM7-250/3 □ circuit breaker									2	4	2		4	2				
CDM7-125/3 □ circuit breaker		4			4						2	4		2	4	6	6	
LMZ1-0.66 □ /5 current transformer							2						3	3	3	3	3	
LMZ3-0.66 □ /5 current transformer		4			4			2	2	4	4	4						
Width of switchgear(mm)		800		800	800	800	800	800	800	800	800	800	800	800	800	800	800	800
Width of switchgear(mm)		600		600	600	600	600	600	600	600	600	600	600	600	600	600	600	600
Note																		

Serial number of primary circuit scheme	37			38			39			40			41			42		
Primary circuit schematic diagram																		
Quantity	Usage			Usage			Usage			Usage			Usage			Usage		
	Code of scheme			Code of scheme			Code of scheme			Code of scheme			Code of scheme			Code of scheme		
Model and Name	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C
HD13BX-1000/30 knife switch	2			2			2			2			2					
HD13BX-600/31 knife switch		2			2			2			2			2			1	
HS13BX-400/31 knife switch			2			2			2			2			2			1
DW15-630/3 circuit breaker	2			2														
DWX15-630/3 circuit breaker		2			2													1
CDM7-400/3 □ circuit breaker							2	2										
CDM7-400/3 □ circuit breaker			2		2	2												
CDM7-250/3 □ circuit breaker								2	4									
NT- □ fuse										6	6	6	12	12	12			3
LMZ1-0.66 □ /5 current transformer	2	2	2	6	6	6	4	2										
LMZ3-0.66 □ /5 current transformer								2	4									
LMZ3D-0.66 □ /5 current transformer										2	2	2	4	4	4			4
LJ- □ current transformer										2	2	2	4	4	4			2
Width of switchgear(mm)	600	600	800	800	800	800	800	800	800	800	800	800	800	800	800			800
Width of switchgear(mm)	600	600	600	600	600	600	600	600	600	600	600	600	600	600	600			600
Note																		

Serial number of primary circuit scheme	43			44			45			46			47			48		
Primary circuit schematic diagram																		
Quantity	Usage			Usage			Usage			Usage			Usage			Usage		
	Code of scheme			Code of scheme			Code of scheme			Code of scheme			Code of scheme			Code of scheme		
Model and Name	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C
HD13BX-600/31 knife switch		1									2			2				
HD13BX-400/31 knife switch		1										2			2			
HS13BX-200/31 knife switch						1												3
DW15-630/3 circuit breaker		1				1												
CJ20-630/3 circuit breaker											1							
CJ20-250/3 circuit breaker						1					1	1						
CJ20-160/3 circuit breaker												1						
CJ20-63/3 circuit breaker														4	4			6
NT- □ fuse		3				9					6	6		12	12			18
JDG-0.5 380/100V voltage breaker		2(3)				2(3)												
LMZ3-0.66 □ /5 current transformer		3				2					2	2		4	4			
LJ- □ zero-phase current transformer		1				2					2	2		4	4			
Width of switchgear(mm)		800				800					800	800		800	800			800
Width of switchgear(mm)		600				600					600	600		600	600			600
Note																		

Serial number of primary circuit scheme	49			50			51			52			53			54		
Primary circuit schematic diagram																		
Quantity	Usage			Usage			Usage			Usage			Usage			Usage		
	Code of scheme			Code of scheme			Code of scheme			Code of scheme			Code of scheme			Code of scheme		
Model and Name	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C
HD13BX-1000/30 knife switch	2																	
HD13BX-600/31 knife switch		2			2			1				1						2
HS13BX-400/31 knife switch								1				1						
HR5-630/3 <input type="checkbox"/> fuse switch														1				
HR5-400/3 <input type="checkbox"/> fuse switch															1			
HG2-160 fuse isolator																		12
CDM7-630/3 circuit breaker					2													
CJ20-630/3 contact					2													
CJ20-250/3 contact	2																	
CJ20-160/3 contact		2																
CJ20-63/3 contact	4	4																
NT- <input type="checkbox"/> fuse	18	18						12	12	18	18			18	18			
SG- <input type="checkbox"/> dry power transformer														1	1			
LMZ3-0.66 <input type="checkbox"/> /5 current transformer							4	4		6	6							
LMZ3D-0.66 <input type="checkbox"/> /5 current transformer					6													
LJ- <input type="checkbox"/> zero-phase current transformer					2													
Width of switchgear(mm)	800	800		800			800	800		800	800		800	800				800
Width of switchgear(mm)	600	600		600			600	600		600	600		600	600				600
Note																		

Serial number of primary circuit scheme	55			56			57			58			59			60		
Primary circuit schematic diagram																		
Quantity	Usage			Usage			Usage			Usage			Usage			Usage		
	Code of scheme			Code of scheme			Code of scheme			Code of scheme			Code of scheme			Code of scheme		
Model and Name	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C
HD13BX-600/31 knife switch		1																
HD13BX-400/31 knife switch			1															
HR5-200/3 <input type="checkbox"/> fuse knife switch						2												
HR5-100/3 <input type="checkbox"/> fuse knife switch							2			4	4		5	5		4	4	
CJ20-100/3 contact		4	4			2				4			2	2		4	4	
CJ20-60/3 contact							2				4					4		
CJ20-40/3 contact														3			4	
JR36-150/3D thermal relay						2				4			2	2		2	2	
JR36-60/3D thermal relay							2				4		3	3		2	2	
NT- <input type="checkbox"/> fuse		12	12															
LMZ1-0.66 <input type="checkbox"/> /5 current transformer		3	3															
LMZ3D-0.66 <input type="checkbox"/> /5 current transformer						2	2			4	4		5	5		4	4	
LJ- <input type="checkbox"/> zero-phase current transformer		4	4			2	2			4	4		5	5				
Width of switchgear(mm)		800	800			800	800			800	800		800	800		800	800	
Width of switchgear(mm)		600	600			600	600			600	600		600	600		600	600	
Note																		

LMZ3D-0.66 □ /5 current transformer						2	2			4	4			5	5			4	4
LJ- □ zero-phase current transformer		4	4			2	2			4	4			5	5				
Width of switchgear(mm)		800	800			800	800			800	800			800	800			800	800
Width of switchgear(mm)		600	600			600	600			600	600			600	600			600	600
Note																			

Serial number of primary circuit scheme	101			102			103			104			105			106		
Primary circuit schematic diagram																		
Quantity	Electricity incoming, contacting			Electricity incoming, contacting			Electricity incoming, contacting			Contacting			Electricity incoming, contacting			Electricity incoming, contacting		
Model and Name	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C
3200A isolating plug										1								
2500A isolating plug											1							
000A isolating plug												1						
CDW17-3205 drawer-type circuit breakers	1			1			1											
CDW17-2505 drawer-type circuit breakers		1			1			1										1
CDW17-2500 drawer-type circuit breakers			1			1			1									1
HR5-100/3 □ fuse knife switch															1			
JDG-0.5/380/100V voltage transformer															2(3)			
LMZ3-0.66U/5 current transformer	3(4)	3(4)	3(4)	3(4)	3(4)	3(4)	3(4)	3(4)	3(4)	3(4)								
Width of switchgear(mm)	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000					800		800	800
Width of switchgear(mm)	600	600	600	600	600	600	600	600	600	600							800	800
Note	DW17-3205 and 2500 drawer-type circuit breakers are equipped with motor-operating mechanism and DWX15C-630 and 400/3 drawer-type circuit breakers are equipped with electromagnetic operating mechanism. The increase of a current transformer quantity in the bracket is for reactive power automatic compensation cabinet. When it is needed to set measuring instrument in distance range and install repay protection in the cabinet, current transformer shall be LMZ3D-0.66 model. Quantity of voltage transformer in the bracket is used for neutral-point earthing by high-resistance. Similarly hereinafter.																	

Serial number of primary circuit scheme	107			108			109			110			111			112		
Primary circuit schematic diagram																		
Quantity	Feeding			Feeding			Feeding			Feeding			Feeding			Feeding		
Model and Name	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C
HD13BX-1000/31 knife switch							1			1								
HD13BX-600/31 knife switch								1			1							
HD13BX-400/31 knife switch									1			1						
HR5-400/3 □ fuse switch										1	1		2				2	
HR5-200/3 □ fuse switch												1	2	4		3	5	
HR5-100/3 fuse isolator							1	1	1						4			

DW1 7-630/3 drawer-type circuit breaker	2																
DWX15C-630/3 circuit breaker		2			2												
DWX15C-400/3 circuit breaker			2			2											
CDM7-630/3 circuit breaker							1			1							
CDM7-400/3 circuit breaker								1			1						
CDM7-250/3 circuit breaker									1								
CJ20-630/3 contactor					2					1							
CJ20-400/3 contactor						2		1			1						
CJ20-160/3 contactor									1			1					
JDG-0.5/380/100V voltage breaker							2(3)	2(3)	2(3)								
LM23D-0.66 □ /5 current transformer	6	6	6		6	6	3	3	3	4	4	4	4	4	4	5	5
LJ- □ zero-phase current transformer	2	2	2		2	2	1	1	1	2	2	2	4	4	4	5	5
Width of switchgear(mm)	1000	800	800		1000	1000	800	800	800	800	800	800	800	800	800	800	800
Width of switchgear(mm)	600	800	800		800	800	600	600	600	600	600	600	600	600	600	600	600

Note

Serial number of primary circuit scheme	113			114			115			116			117			118		
Primary circuit schematic diagram																		
Quantity	Feeding			Feeding			Feeding			Feeding			Feeding			Feeding		
Usage																		
Code of scheme																		
Model and Name	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C
HR5-630/3 □ fuse switch				2														
HR5-400/3 □ fuse switch	2				2													
HR5-200/3 □ fuse switch		2				2	2											
HR5-100/3 □ fuse switch	1	1	3				1	2		2			2					
CJ20-400/3 contactor				2				2		2			3	5				
CJ20-250/3 contactor					2	1												
CJ20-160/3 contactor							1			2			2					
CJ20-100/3 contactor														2				
JDG-0.5/380/100V voltage breaker	2(3)	2(3)	2(3)															
LM23D-0.66 □ /5 current transformer	2	2	2	2	2	2	3	3		4			5	5				
LJ- □ zero-phase current transformer	2	2	2	2	2	2	3	3		4			5	5				
Width of switchgear(mm)	800	800	800	800	800	800	800	800		800			800	800				
Width of switchgear(mm)	600	600	600	600	600	600	600	600		600			600	600				

Note

Serial number of primary circuit scheme	119			120			121			122			123			124		
Primary circuit schematic diagram																		
Quantity / Usage / Code of scheme	Feeding			Feeding			Feeding						Feeding, illumination					
	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C
Model and Name																		
HD13BX-1000/31 knife switch	2												2					
HD13BX-600/31 knife switch		2			2			2										
DWX15C-630/3 circuit breaker	2																	
DWX15C-400/3 circuit breaker		2																
CDM7-400/3 circuit breaker					2													
CDM7-200/3 circuit breaker								4										
CJ20-400/3 contactor					2													
CJ20-160/3 contactor								4										
HG2-160 fuse isolator													12					
LM23D-0.66 □ /5 current transformer	6	6			6			4										
LJ- □ zero-phase current transformer	2	2			2			4										
Width of switchgear(mm)	800	800			800			800					1000					
Width of switchgear(mm)	600	600			600			600					600					
Note																		

Serial number of primary circuit scheme	125			126			127			128			129			130		
Primary circuit schematic diagram																		
Quantity / Usage / Code of scheme	Feeding			Feeding			Feeding						Feeding, illumination					
	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C
Model and Name																		
HD13BX-1000/31 knife switch													1			1		
HD13BX-600/31 knife switch														1			1	
HD13BX-400/31 knife switch															1			1
HR5-200/3 □ fuse switch	2																	
HR5-100/3 □ fuse switch		2	2	4	4	4	5	5	5	4	4	4						
CDC1-105 (or CDC1-170) contactor	2			2			2	2		4	4							
CDC7-95 contactor		2		2	4				2			4						
CDC7-65 contactor			2			4	3		3	4		4						
CDC7-40 contactor								3			4							
CDR1-105 (or CDR1-170) thermal relay	2						2	2		2	2							
CDR7-93 thermal relay		2		4	2				2			2						
T45 (or CDR7-93) thermal relay			2		2	4	3		3	2	2	2						
CDR7-36 thermal relay								3										

NT-□ fuse													12	12	12	18	18	18
LM23-0.660/5 current transformer													4	4	4	6	6	6
LM23D-0.66 □ /5 current transformer	2	2	2	4	4	4	5	5	5	4	4	4						
LJ-□ zero-phase current transformer	2	2	2	4	4	4	5	5	5									
Width of switchgear(mm)	800	600	800	800	800	800	800	800	800	800	800	800	800	800	800	800	800	800
Width of switchgear(mm)	600	600	600	600	600	600	600	600	600	600	600	600	600	600	600	600	600	600
Note																		

Serial number of primary circuit scheme	CDGGJ1-01			CDGGJ1-02			CDGGJ2-01			CDGGJ2-02								
Primary circuit schematic diagram																		
Quantity	Usage		Reactive power compensation			Reactive power compensation			Reactive power compensation			Reactive power compensation						
	Code of scheme		A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	
Model and Name																		
HD13BX-1000/31 knife switch							1	1	1	1	1	1						
HD13BX-600/31 knife switch	1	1	1	1	1	1												
LMZ2-0.66 □ /5 current transformer	3	3	3	3	3	3	3	3	3	3	3	3						
RT14-63 Fuse	30	24	18	30	24	18	30	24	18	30	24	18						
Y1.5W-0.28/1.3 metallic oxide lightning protector	3	3	3	3	3	3	3	3	3	3	3	3						
B30C-30-20 □ contactor	10	8	6	10	8	6	10	8	6	10	8	6						
JR36-63/3 relay	10	8	6	10	8	6	10	8	6	10	8	6						
JKW20B power factor automatic compensation controller	1	1	1				1	1	1									
BSMJ04-16-3(BW0.4-16-3)	10(10)	8(8)	6(6)	10(10)	8(8)	6(6)	10(10)	8(8)	6(6)	10(10)	8(8)	6(6)						
Width of switchgear(mm)	1000	800	800	1000	800	800	1000	800	800	1000	800	800						
Width of switchgear(mm)	600	600	600	600	600	600	600	600	600	600	600	600						
Note	Main switchgear			Auxiliary switchgear			Main switchgear			Auxiliary switchgear								