

F4 automatic control switch

KG316TD series time control switch



Selection guide

Product name	Function and installation form	Rated control supply voltage
KG316T	D	<input type="checkbox"/>
	D: Standard mounting rail (35mm) installation, 10 on 10 off time automatic control	220: AC220V 380: AC380V

Product characteristics

- Ac frequency 50Hz, rated control power supply voltage AC380V or below
- Street lights, neon lights, advertising signs, radio and television equipment, etc. all need to open and close the circuit equipment and similar household equipment in the timing time control


Technical parameter

Contact capacity (resistive)V·A	250·20 (AC)
Travel time error/day	s ≤5
Mechanical life	time $\geq 1 \times 10^5$
Electrical life	time $\geq 1 \times 10^5$
Power dissipation	≤3
Rated control supply voltage	220 (AC) 、 380 (AC)
Control time	1min ≤ t ≤168h (Time control according to daily cycle or weekly cycle)

F4 automatic control switch

KG316TD series time control switch

Shape and mounting size (mm)

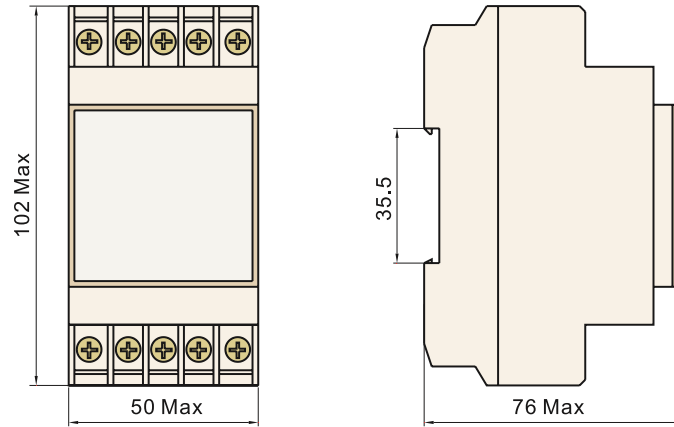

Wiring diagram

